


# PCB|SKL

## EMC Shield Clamps for Printed Circuit Boards

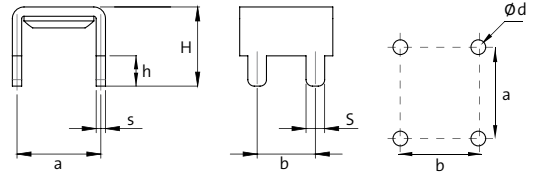

### Product Description

PCB|SKL shield clamps can be used for shielding single cables. The shield clamps are easy to use and enable a reliable shielding of cables.

PCB|SKL consist of SKL clamps, fixed on a soldering foot that enables assembly on printed circuit boards. There are various designs to choose from.

Type	Order No.	Height H [mm]	Width s [mm]	Pin h [mm]	Pin S [mm]	Grid a x b [mm]	Drill-hole d [mm]	PU
PCB-4-V-6,8 SKL 1.5-3 (Clamping range 1.5 - 3 mm)	36650.1	6.8	0.8	2.6	1.6	5 x 7.2	Ø 1.8	10
PCB-4-V-6,8 SKL 3-6 (Clamping range 3 - 6 mm)	36650.2	6.8	0.8	2.6	1.6	5 x 7.2	Ø 1.8	10
PCB-4-V-6,8 SKL 6-8 (Clamping range 6 - 8 mm)	36650.3	6.8	0.8	2.6	1.6	5 x 7.2	Ø 1.8	10
PCB-4-V-12,5 SKL 1.5-3 (Clamping range 1.5 - 3 mm)	36656.1	12.5	1	4	1.6	5 x 10.1	Ø 1.8	10
PCB-4-V-12,5 SKL 3-6 (Clamping range 3 - 6 mm)	36656.2	12.5	1	4	1.6	5 x 10.1	Ø 1.8	10
PCB-4-V-12,5 SKL 6-8 (Clamping range 6 - 8 mm)	36656.3	12.5	1	4	1.6	5 x 10.1	Ø 1.8	10

4

### Advantages

- Permanent, continuous pressure on the cable shield, no adjustment of the spring load required
- Optimal contact of the cable shield

### Specifications

**Material**  
SKL-clamp Spring steel, zinc plated  
PCB-foot Brass, tin plated

### Accessories

Stripping tool Page 103