

KEL-QTA

Split cable entry plates



1

Product description

The KEL-QTA easily routes pre-terminated cables, multi-conductors, hoses or conduits without using any tools for assembly.

Advantages & benefits

- Quick assembly without tools
- High cable density by using multi-position grommets
- Simple assembly and disassembly in case of change or service
- Routing of cables with and without connectors in a high density
- Suitable for standard industrial connector cut-outs

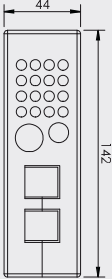
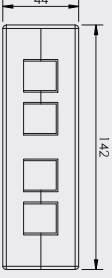
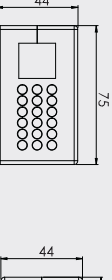
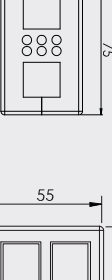

Specifications

Material Elastomer
Flame class UL94-Vo, self-extinguishing
IP rating IP54, with correct selection of the cable grommets QT
Temperature - 40°C to + 90°C (static)
Properties Halogen-free, silicone-free

Type A: For wall thickness 1.5 - 2.5 mm
Type B: For wall thickness 2.8 - 4 mm

Accessories

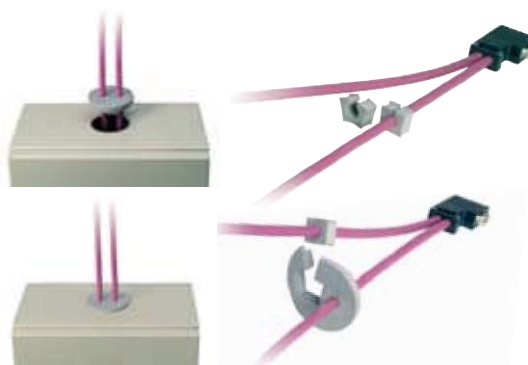
QT Cable grommets 56
 ST-B Plugs 76
 FP Flange plates 152 - 157

Description	Type	Order No. Type A	Order No. Type B	Cut-out [mm]	Cables	PU
	KEL-QTA 24 2 -DP 18	43642	43643	112 × 36	pre-terminated - 15 mm without connector 16× max. 7 mm 1× max. 12 mm 1× max. 16 mm	10
	KEL-QTA 24 4	43644	43645	112 × 36	pre-terminated - 15 mm	10
	KEL-QTA 10 1 -DP 18	43655	43658	65 × 36	pre-terminated - 15 mm without connector 18× max. 5 mm	10
	KEL-QTA 10 2 -DP 6	43656	43659	65 × 36	pre-terminated - 15 mm without connector 6× max. 5 mm	10
	KEL-QTA-B4	43660	-	46 × 46	pre-terminated - 15 mm	



KEL-QTA round | KEL-QTE

Split cable entry plates



Type	Order No. Type A	Order No. Type B	Cut-out [mm]	Cables		PU	Description
				pre-terminated	non-pre-term.		

KEL-QTA 32	43632	43636	∅ 32	1 × 3 - 15 mm	-	10	
KEL-QTA 50	43622	43626	∅ 50	2 × 3 - 15 mm	-	10	
KEL-QTE 20 2.5	43412	-	∅ 20	1 × 2.6 - 3.2 mm	1 × max. 5.2 mm	10	
KEL-QTE 20 3	43413	-	∅ 20	1 × 3.1 - 3.8 mm	1 × max. 5.2 mm	10	
KEL-QTE 20 4	43414	-	∅ 20	1 × 3.8 - 4.8 mm	1 × max. 5.2 mm	10	
KEL-QTE 20 5	43415	-	∅ 20	1 × 4.7 - 5.6 mm	1 × max. 5.2 mm	10	

Product description

The KEL-QTA easily routes pre-terminated cables, multi-conductors, hoses or conduits without using any tools for assembly.

Advantages & benefits

- Fast and easy assembly without tools
- Increased cable density by using multi-position grommets
- Simple assembly and disassembly in case of change or service
- Routing of cables with and without connectors in a high density

Specifications

Material	Elastomer
Flame class	UL94-Vo, self-extinguishing
IP rating	IP54, with correct selection of the cable grommets (QT single)
Temperature	- 40°C to + 90°C (static)
Properties	Halogen-free, silicone-free
Cut-out dimension	Metric sizes

Type A:	For wall thickness 1.5 - 2.5 mm
Type B:	For wall thickness 2.8 - 4 mm

Accessories

QT Cable grommets 56