

KLKB / KLB


Cable ties with hook-and-loop fastener



Product description

Cable ties with hook-and-loop fastener are a more and more common fixing mode for cables. Cable ties with hook-and-loop fastener are used instead of standard cable ties, because they can be easily closed and opened several times. The soft material is gentle on cables especially where vibrations are present.

Cable ties with hook-and-loop fastener are available individually (KLKB) in four different sizes or as a continuous roll (KLB) in four different sizes.

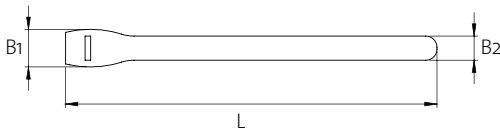

Advantages

- Cable ties with hoop-and-loop fastener are re-usable
- Adaptable
- The cable tie material is gentle on cables, especially if there are vibrations

Specifications

Material **Polypropylene + Velour PA**
 Colour **black**
 Flame class **UL94-V2**
 Temperature **-30°C to +80°C**


Accessories

KBH Holder for hook-and-loop fastener Page 141


Type	Size [mm]			Order No.	PU
	L	B1	B2		
KLKB 200 × 7 bk	200	13	7	61021	100
KLKB 200 × 13 bk	200	20	13	61022	100
KLKB 230 × 13 bk	230	20	13	61023	100
KLKB 300 × 17 bk	300	25	17	61024	100
KLB 10 bk			10	61011	25 m
KLB 15 bk			15	61012	25 m
KLB 20 bk			20	61013	25 m
KLB 25 bk			25	61014	25 m

KBH

Holder for hook-and-loop fastener

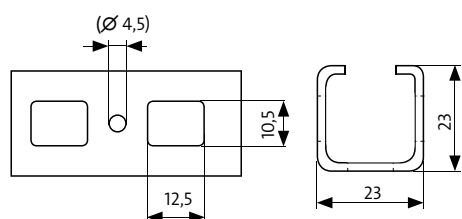

23 × 23 mm mounting rail

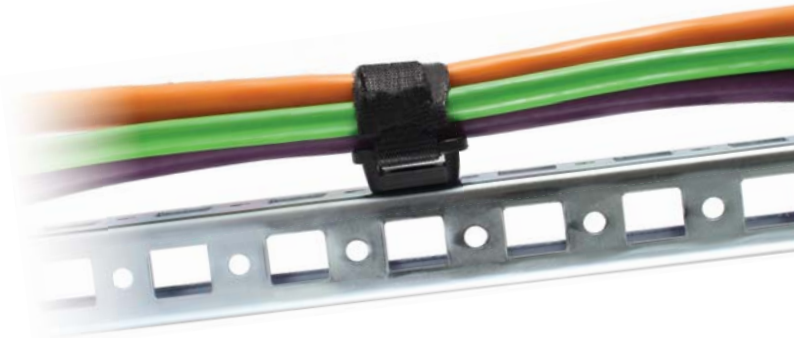

Description	Type	Order No.	fits KLKB KLB	Fits for	PU
-------------	------	-----------	-----------------	----------	----

Holder for hook-and-loop fastener, screwable

	KBH-S	■ 61019	KLKB 200 × 7 KLKB 200 × 13 KLB 10	23 × 23 mm mounting rail	100
	KBH-SB	■ 61002	KLKB 200 × 7	universal	100

Holder for hook-and-loop fastener, pluggable

	KBH-R	■ 61018	KLKB 200 × 7 KLKB 200 × 13 KLB 10	23 × 23 mm mounting rail	100
	KBH-RBA nc	□ 61003	KLKB 200 × 7	drill-hole Ø 6.0 mm	100
	KBH-RBB	■ 61004	KLKB 200 × 7	drill-hole Ø 6.5 mm	100

Product description

These holders can be used in combination with cable ties with hook-and-loop fastener KLKB and hook-and-loop tape KLB. Large variety of holders provides unique and numerous mounting possibilities.

Advantages

- Assembly within seconds
- Secure hold
- Flexible usage

Specification KBH-S / KBH-R

Material	Polyamide (PA)
Colour	■ black
Flame class	UL94-Vo, self-extinguishing
Temperature	- 40°C to + 110°C
Properties	Halogen-free, silicone-free

Specification KBH-SB / KBH-RBA

Material	Polyamide (PA)
Colour	■ black (KBH-SB) □ nc (KBH-RBA)
Flame class	UL94-V2
Temperature	- 40°C to + 85°C (short-term to 110°C)

Specification KBH-RBB

Material	Polyamide (PA)
Colour	■ black
Temperature	- 40°C to + 120°C

Accessories

KLKB / KLB Cable ties with hook-and-loop fastener Page 140