

KEL-JUMBO

Cable Entry Frames



KEL-JUMBO also available with V2A screws.

1

Product Description

The KEL-JUMBO cable entry system for installation of cables and conduits with a diameter of up to 65 mm, especially suited for supply cables.

The innovative insert design enables dynamic and flexible movement.

We recommend round cut-outs, which can be made using standard tools.

Suggested cut-out: cable diameter +15% - 20%.

Advantages



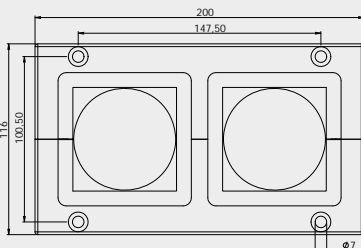

- Installation of cables up to 65 mm
- KTF inserts allow dynamic and flexible movement
- Retrofitting and maintenance can be carried out easily and quickly
- Strain relief according to EN 50262

Specifications

Material	Polyamide (PA)
Flame class	UL94-Vo, self-extinguishing
Protection class	IP54
Temperature	- 40°C to + 140°C (static)
Properties	Halogen free, silicone free
Cut-out dimensions	Round, cable diameter +15%

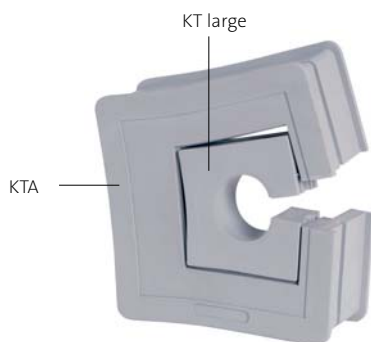
Accessories

KTF Cable inserts	Page 41
KDR-ESR Base plates	Page 126 - 127
KDR2 Split base plates	Page 128 - 129
MP Module plates	Page 138

Description	Type	Order No.	Dimension length width height	PU
	KEL-JUMBO 1	42360	110 × 116 × 35	1
	KEL-JUMBO 1 with V2A screws	42360.200	110 × 116 × 35	1
	KEL-JUMBO 2	42350	200 × 116 × 35	1
	KEL-JUMBO 2 with V2A screws	42350.200	200 × 116 × 35	1

KTF

Inserts for KEL-JUMBO



Type	Order No. gray	Clamping range	PU
KTF 00	42371	Blind Insert	1
KTA	42370	Adapter Insert for KT large	1
KTF 34	42376	33 - 36 mm	1
KTF 38	42379	37 - 40 mm	1
KTF 42	42382	41 - 44 mm	1
KTF 46	42385	45 - 48 mm	1
KTF 50	42388	48 - 52 mm	1
KTF 54	42391	53 - 56 mm	1
KTF 58	42394	56 - 60 mm	1
KTF 62	42397	61 - 65 mm	1

Product Description

The inserts KTF are suitable for cable diameters up to 65 mm.

Suitable for KEL-JUMBO cable entry frames.

Cables with a comparatively smaller diameter can be utilized with KEL-JUMBO frames by using an adapter insert.

Specifications

Material	Elastomer
Flame class	UL94-Vo, self-extinguishing
Protection class	IP54
Temperature	- 40°C to + 90°C (static)
Properties	Halogen free, silicone free

Fits with

KEL-JUMBO Cable entry frames Page 40

Accessories

KT Cable inserts, large Page 32